
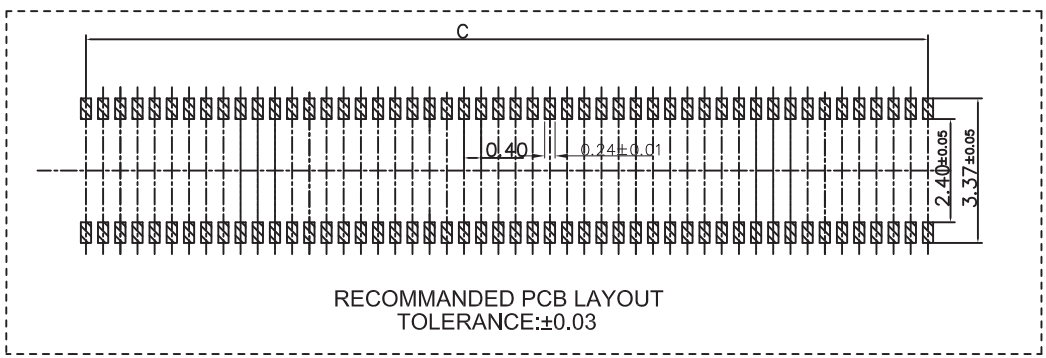


REV.	ECN No.	DATE
A	ED-1108-003	2011.08.11

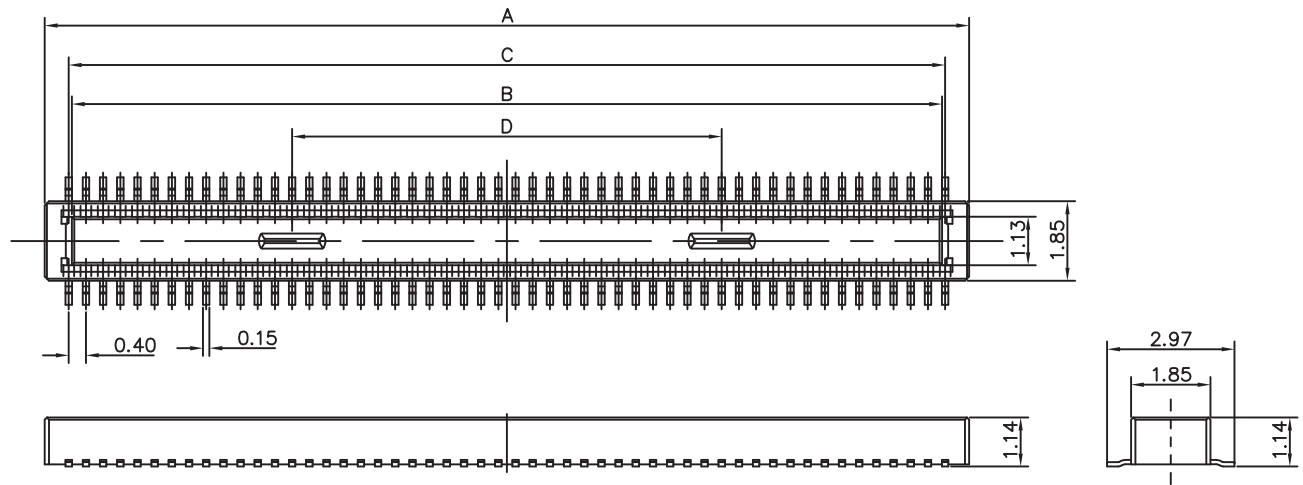

5001 BM 04 ** 15 **

BTB Conn:Male
Series
Position Number:**Pin
Mate Height:1.5mm
Plating




PIN	20	30	40	50	60	80	100	120
A							21.52	
B							20.26	
C							20.40	
D							10.00	

- NOTES -
- MATERIAL SEE TABLE;
 - ELECTRICAL PERFORMANCES:
 - RATED CURRENT:0.5A;
 - CONTACT RESISTANCE: 100 mOHMS MAX.;
 - INSULATION RESISTANCE: 50 MOHMS MIN.;
 - WITHSTANDING VOLTAGE: 100 VAC FOR 1 MINUTE MIN.;
 - MECHANICAL PERFORMANCES:
 - DURABILITY:30 CYCLES;
 - OPERATION TEMPERATURE:-35° TO +85°;
 - NORMAL INSERT FORCE AT MATED POSITION:5N MAX;

2	Housing	1	LCP	Glass: 30%	Black
1	Terminal	N	C5191H	NI 50~90u"UNDERPLATING, GOLD FLASH OVER ALL	
ITEM	Part Name	Q'TY	MATERIAL	FINISH	REMARK

GENREL TOLERANCE		UNITS: mm	NAME(INTENDED USE)	东莞市文章济美电子有限公司	
X.± 0.15	X°± 1°	SEE NOTES	0.4MM BTB 1.5H Male Conn		
.X± 0.10	.X°± 0.5°		FINISH:	PART NO.(INTENDED USE)	TITLE:
.XX± 0.05		SEE NOTES	5001BM04**15**	5001BM04**15**	0.4MM BTB 1.5H Male Conn Customer Drawing
THE DRAWING AND SPECIFICATION ARE THE PROPERTY OF DRAKA ELE&TEC CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN DRAKA ELE&TEC CO.,LTD			APPD:	DWG NO.:	
			Weight:	5001BM04**15**	
			CHKD:	SCALE SHEET REV.	
			DR: F Pan	5:1 1/1 A	


REV.	ECN No.	DATE
A	RD-1108-003	2011.08.11

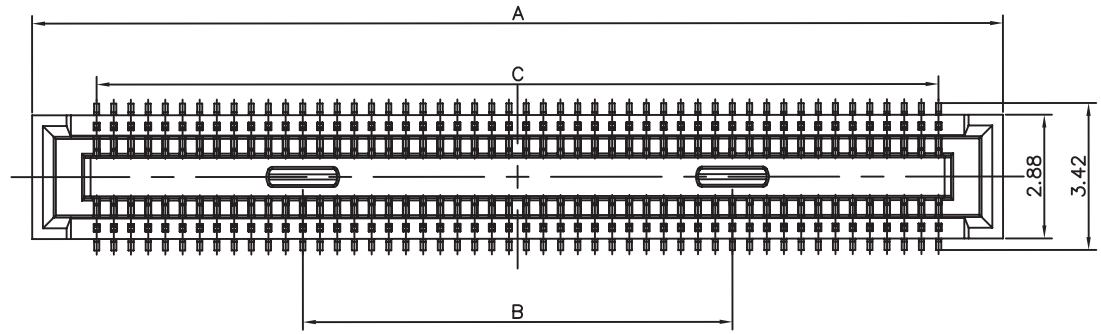

5001 B F 04 ** 15 **

BTB Conn:Female
 Series
 Position Number:**Pin
 Mate Height:1.5mm
 Plating

- NOTES -
1. MATERIAL SEE TABLE;
 2. ELECTRICAL PERFORMANCES:
 2-1.RATED CURRENT:0.5A;
 2-2.CONTACT RESISTANCE: 100 mOHMS MAX.;;
 2-3.INSULATION RESISTANCE: 50 MOHMS MIN.;
 3. MECHANICAL PERFORMANCES:
 3-1.DURABILITY:30 CYCLES;
 3-2.OPERATION TEMPERATURE:-35° TO +85°;

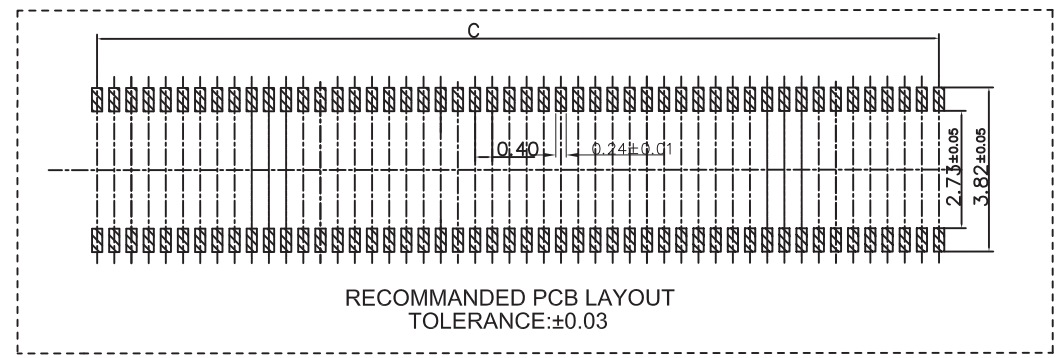

PIN	20	30	40	50	60	80	100	120
A							22.60	
B							10.00	
C							19.40	

ITEM	Part Name	Q'TY	MATERIAL	FINISH	REMARK
2	Housing	1	LCP	Glass: 30%	Black
1	Terminal	N	C5240ESH	Ni 50~90μ"UNDERPLATING, GOLD FLASH OVER ALL	

GENERL TOLERANCE X. ± 0.15 .X ± 0.10 .XX ± 0.05		UNITS: mm MAT'L: SEE NOTES FINISH: SEE NOTES Weight:	NAME(INTENDED USE) 0.4MM BTB 1.5H Female Conn PART NO.(INTENDED USE) 5001BF04001510-C APPD: CHKD: DR: P F	东莞市文章济美电子有限公司 TITLE: 0.4MM BTB 1.5H Female Conn Customer Drawing DWG NO.: 5001BF04001510-C	SCALE 5:1	SHEET 1/1	REV. A
---	--	---	---	--	---------------------	---------------------	------------------

THE DRAWING AND SPECIFICATION ARE THE PROPERTY OF DRAKA ELE&TEC CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN DRAKA ELE&TEC CO.,LTD