



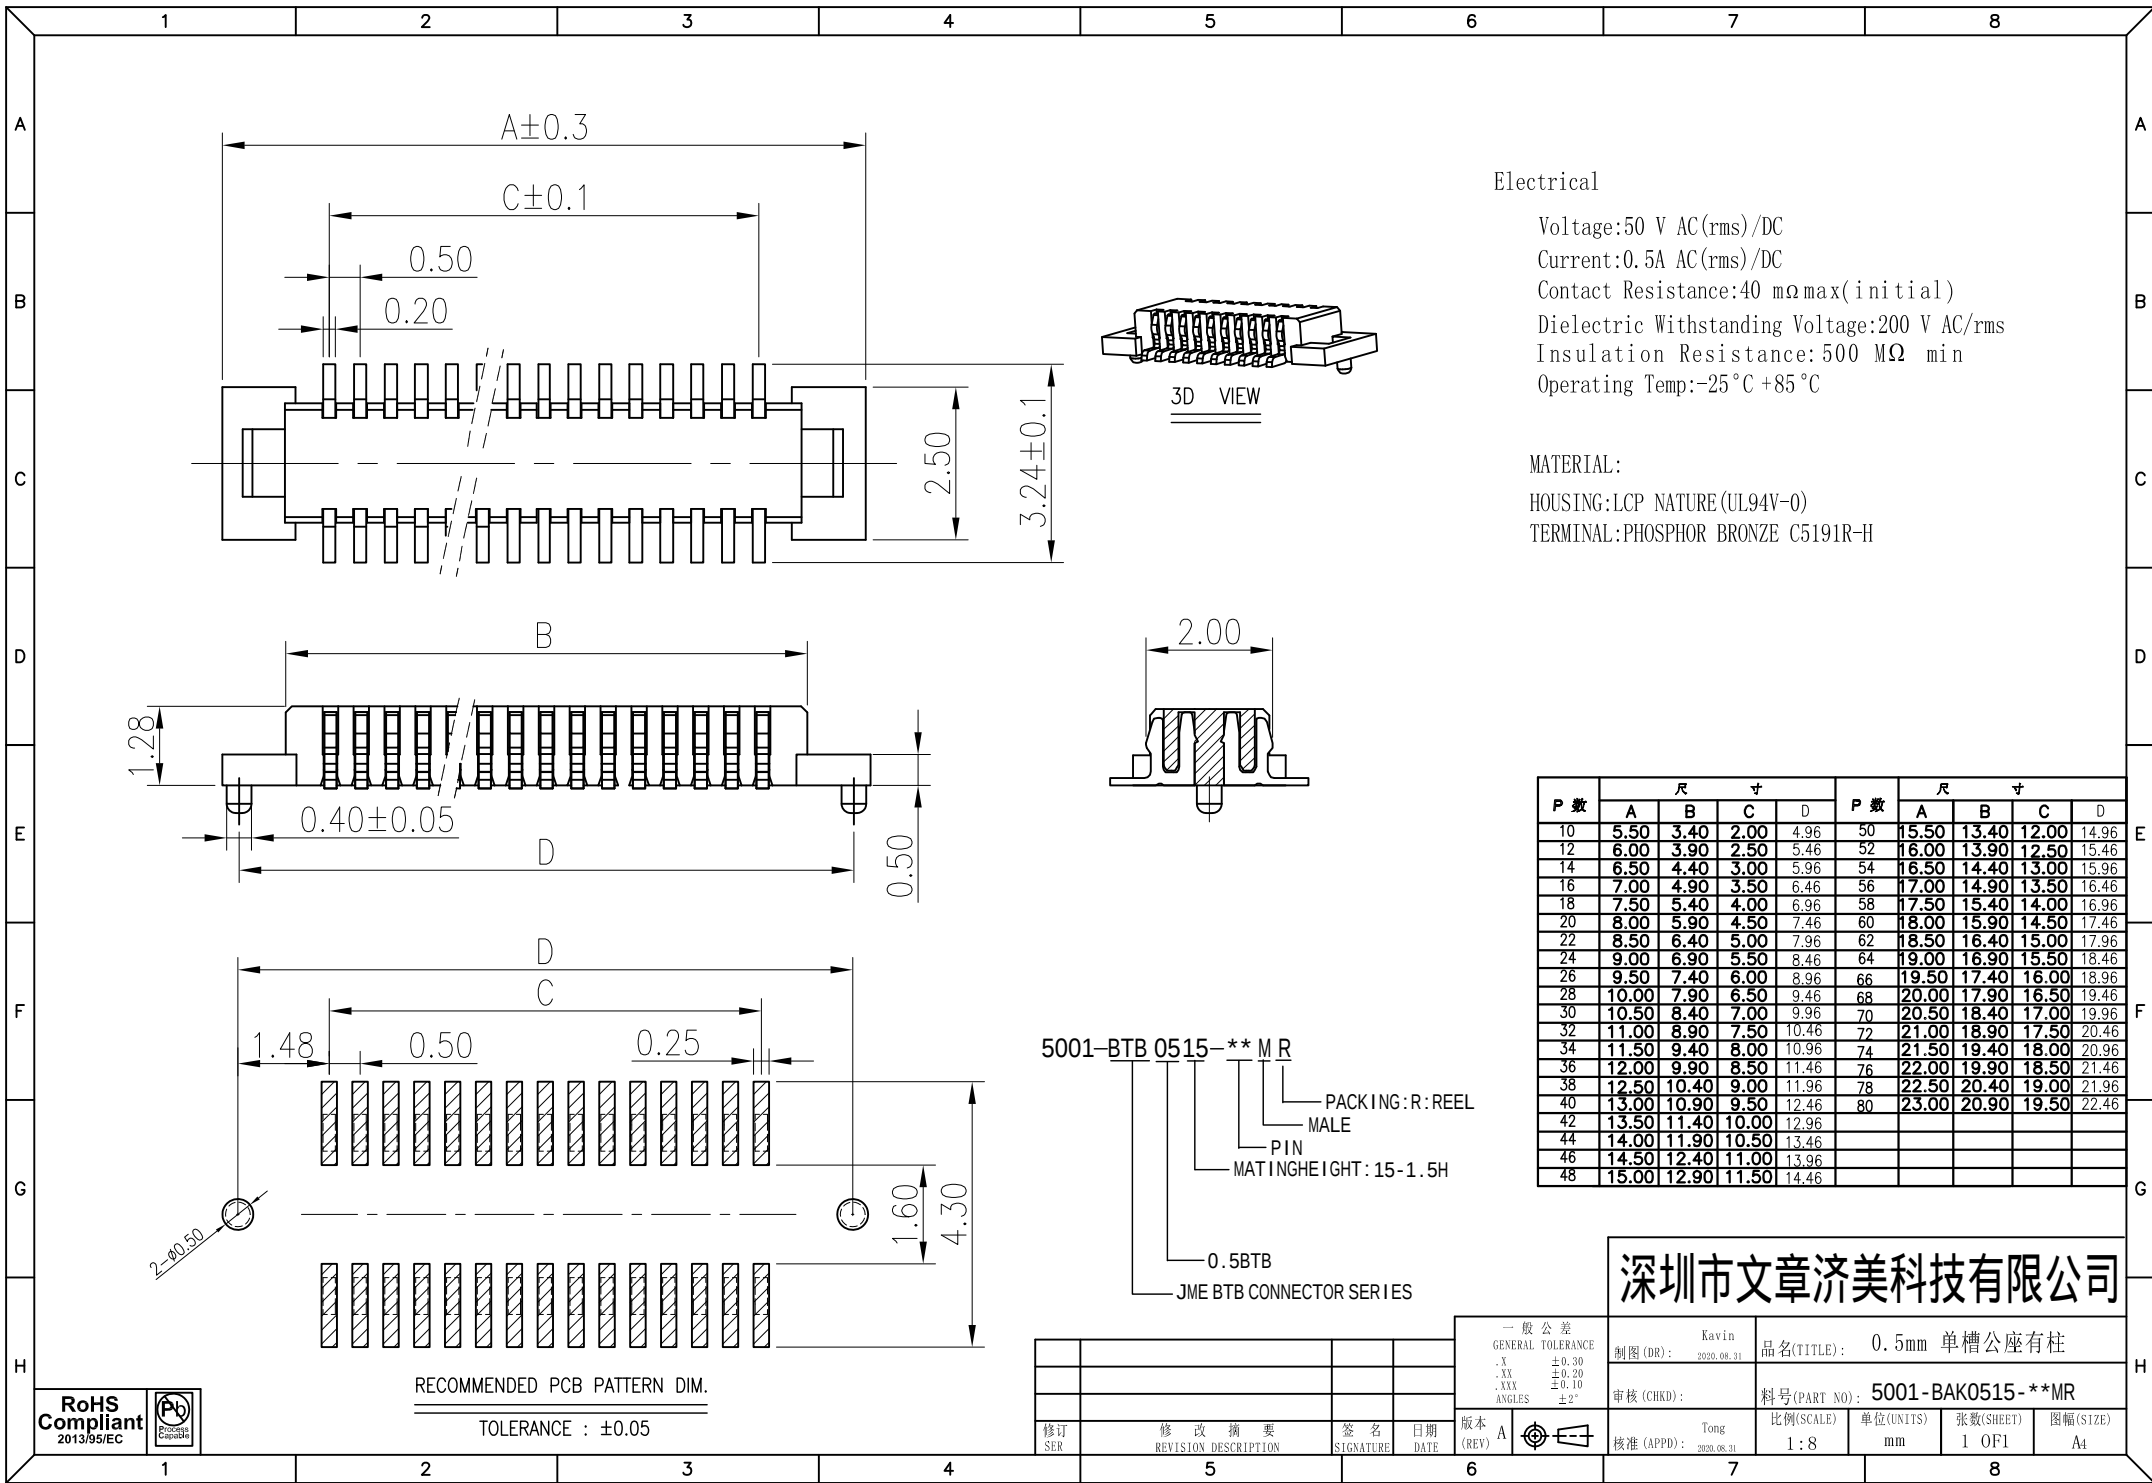

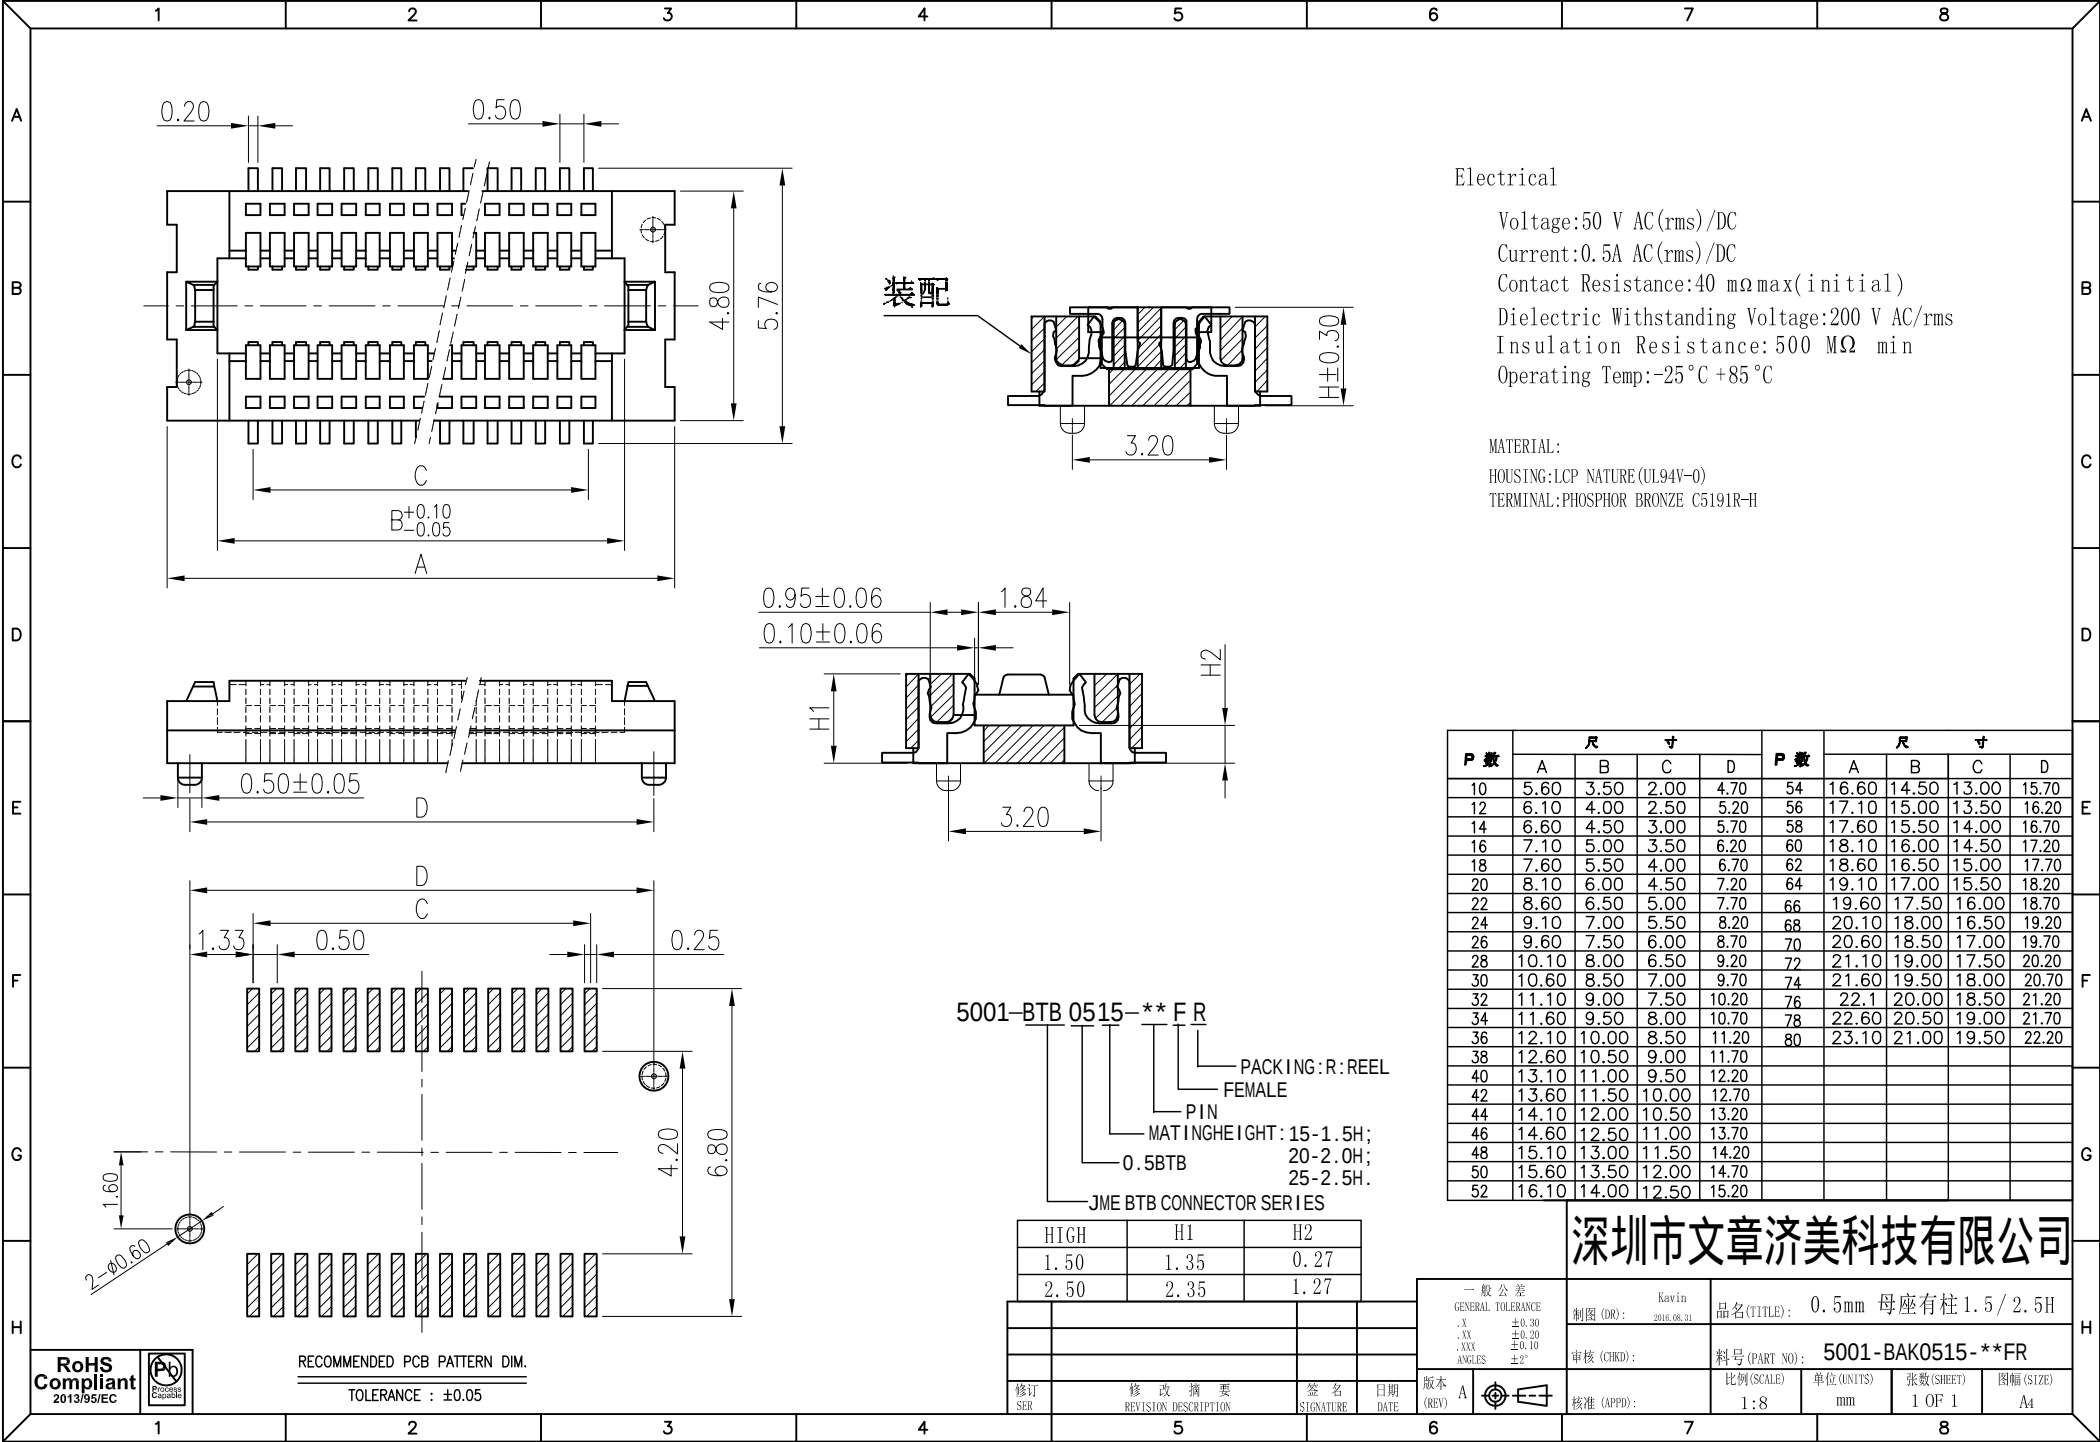

Electrical

Voltage:50 V AC(rms)/DC
Current:0.5A AC(rms)/DC
Contact Resistance:40 mΩmax(initial)
Dielectric Withstanding Voltage:200 V AC/rms
Insulation Resistance:500 MΩ min
Operating Temp:-25℃ +85℃

MATERIAL:
HOUSING:LCP NATURE (UL94V-0)
TERMINAL:PHOSPHOR BRONZE C5191R-H

P 数	尺寸				P 数	尺寸			
	A	B	C	D		A	B	C	D
10	5.60	3.50	2.00	4.70	54	16.60	14.50	13.00	15.70
12	6.10	4.00	2.50	5.20	56	17.10	15.00	13.50	16.20
14	6.60	4.50	3.00	5.70	58	17.60	15.50	14.00	16.70
16	7.10	5.00	3.50	6.20	60	18.10	16.00	14.50	17.20
18	7.60	5.50	4.00	6.70	62	18.60	16.50	15.00	17.70
20	8.10	6.00	4.50	7.20	64	19.10	17.00	15.50	18.20
22	8.60	6.50	5.00	7.70	66	19.60	17.50	16.00	18.70
24	9.10	7.00	5.50	8.20	68	20.10	18.00	16.50	19.20
26	9.60	7.50	6.00	8.70	70	20.60	18.50	17.00	19.70
28	10.10	8.00	6.50	9.20	72	21.10	19.00	17.50	20.20
30	10.60	8.50	7.00	9.70	74	21.60	19.50	18.00	20.70
32	11.10	9.00	7.50	10.20	76	22.1	20.00	18.50	21.20
34	11.60	9.50	8.00	10.70	78	22.60	20.50	19.00	21.70
36	12.10	10.00	8.50	11.20	80	23.10	21.00	19.50	22.20
38	12.60	10.50	9.00	11.70					
40	13.10	11.00	9.50	12.20					
42	13.60	11.50	10.00	12.70					
44	14.10	12.00	10.50	13.20					
46	14.60	12.50	11.00	13.70					
48	15.10	13.00	11.50	14.20					
50	15.60	13.50	12.00	14.70					
52	16.10	14.00	12.50	15.20					

5001-BTB 0515-** F R
PACKING: R: REEL
FEMALE
PIN
MATING HEIGHT: 15-1.5H;
20-2.0H;
25-2.5H.
JME BTB CONNECTOR SERIES

HIGH	H1	H2
1.50	1.35	0.27
2.50	2.35	1.27

深圳市文章济美科技有限公司




RECOMMENDED PCB PATTERN DIM.
TOLERANCE : ±0.05

修订	修改摘要	签名	日期
SER	REVISION DESCRIPTION	SIGNATURE	DATE

版本	一般公差
(REV)	GENERAL TOLERANCE
A	±0.30
	.X ±0.20
	.XX ±0.10
	.XXX ±0.05
	ANGLES ±2°

制图 (DR):	Kevin	品名 (TITLE):	0.5mm 母座有柱 1.5 / 2.5H
审核 (CHKD):		料号 (PART NO):	5001-BAK0515-**FR
核准 (APPD):		比例 (SCALE):	1:8
		单位 (UNITS):	mm
		张数 (SHEET):	1 OF 1
		图幅 (SIZE):	A4

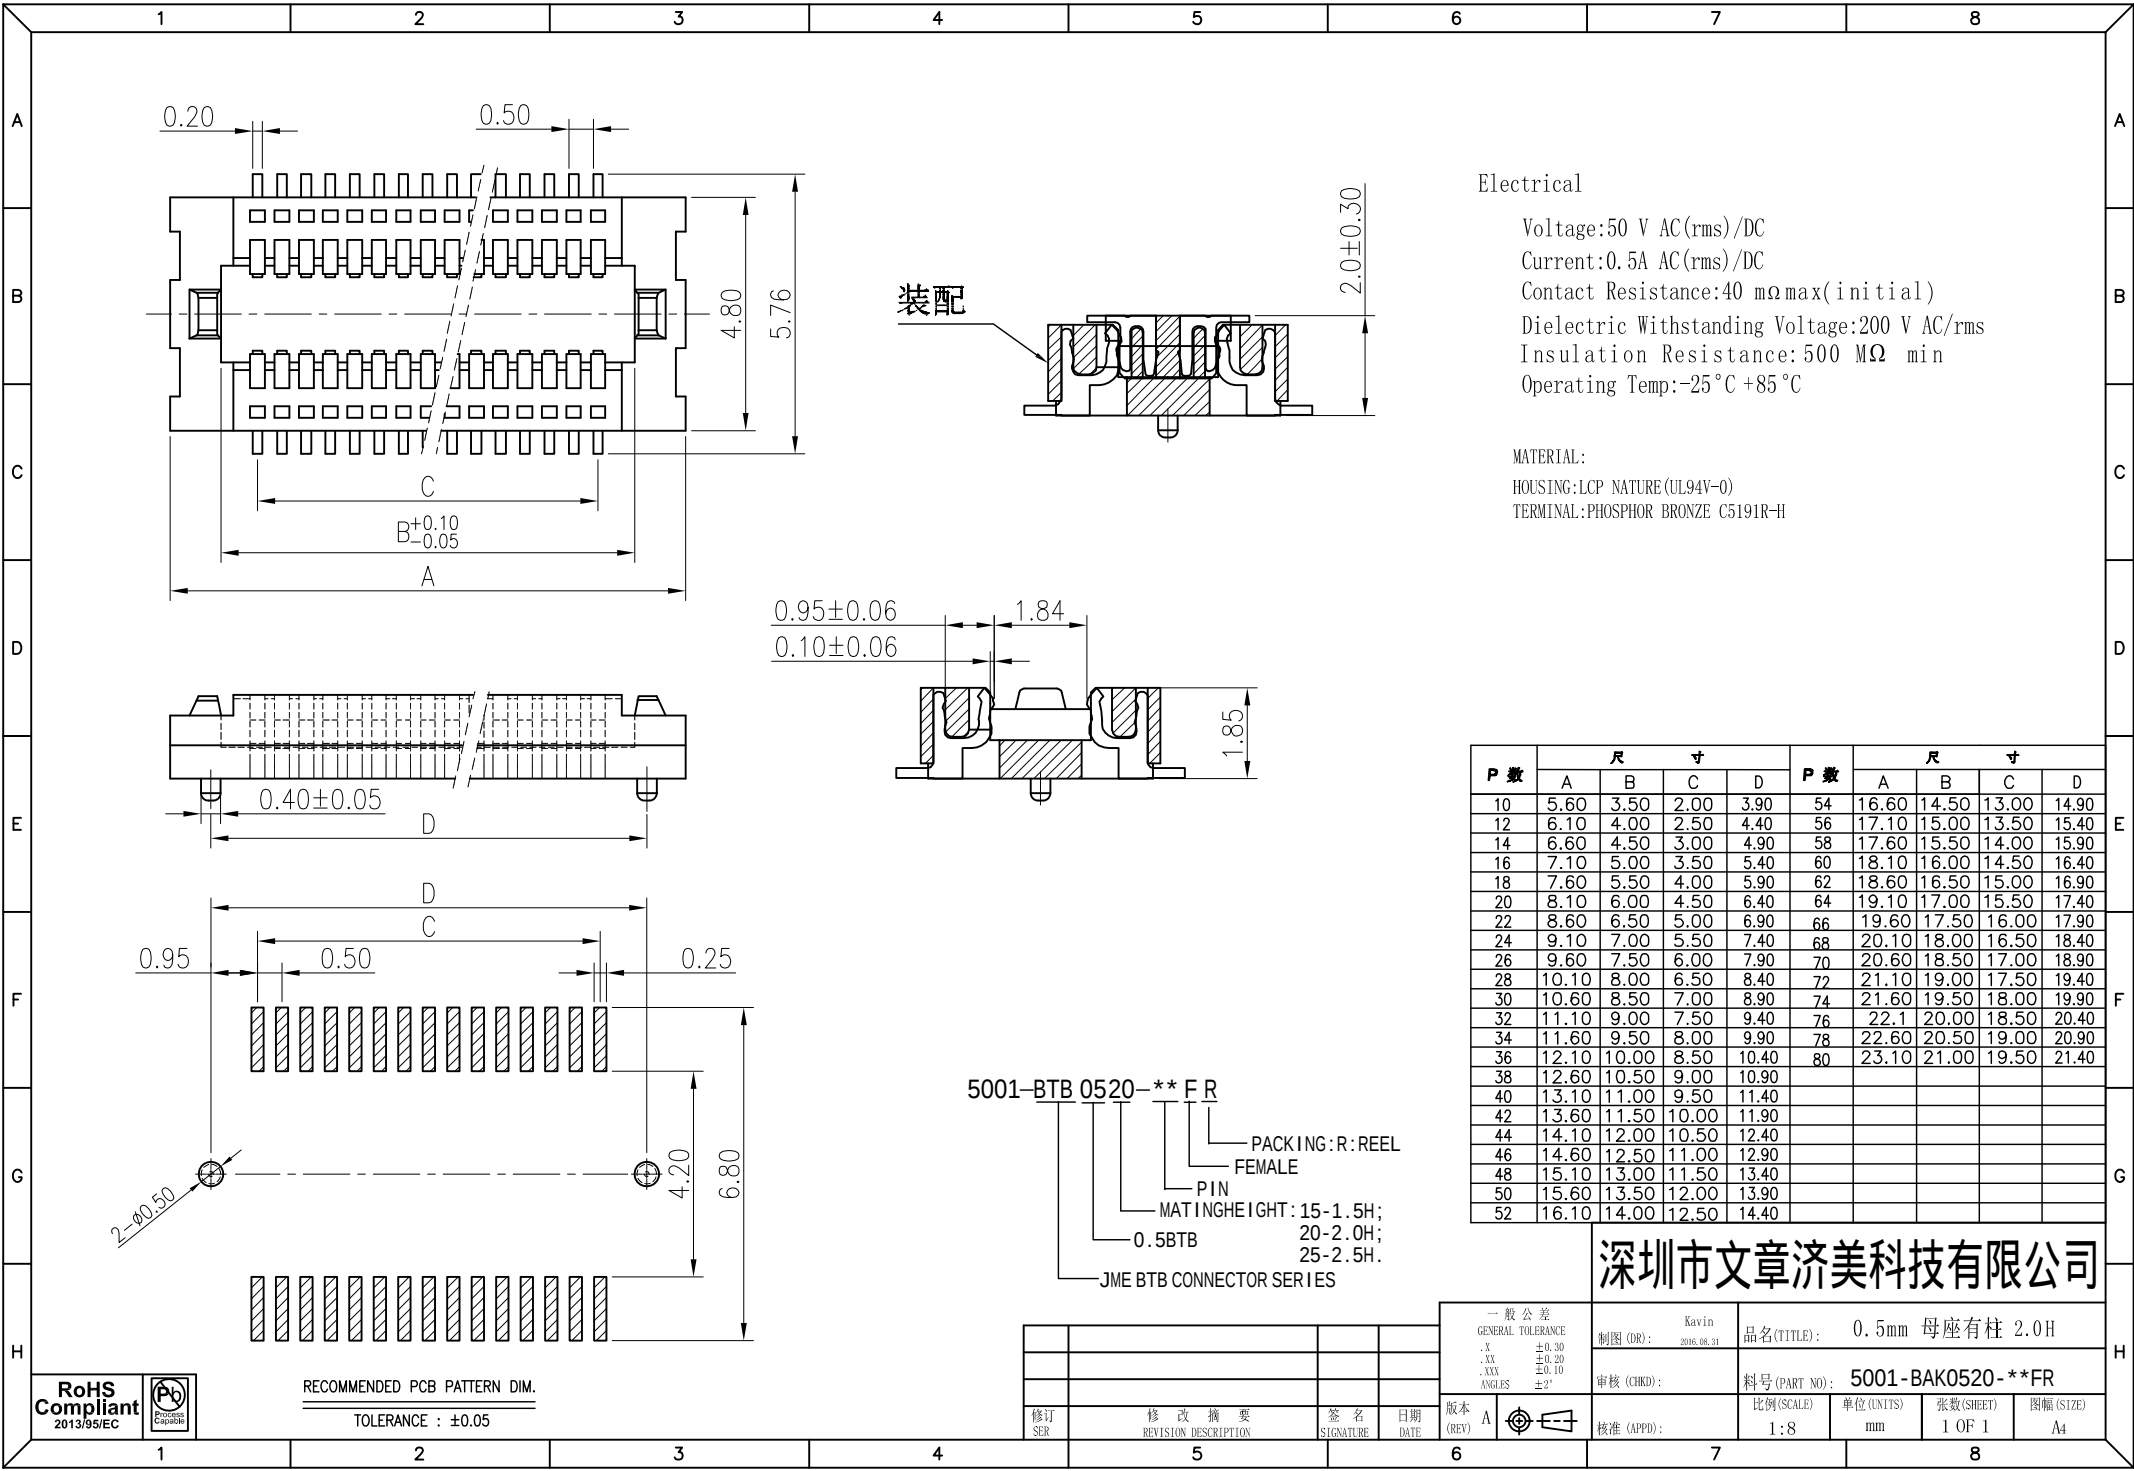

Electrical

Voltage:50 V AC(rms)/DC
Current:0.5A AC(rms)/DC
Contact Resistance:40 mΩmax(initial)
Dielectric Withstanding Voltage:200 V AC/rms
Insulation Resistance:500 MΩ min
Operating Temp:-25℃+85℃

MATERIAL:
HOUSING:LCP NATURE(UL94V-0)
TERMINAL:PHOSPHOR BRONZE C5191R-H

P 数	尺 寸				P 数	尺 寸			
	A	B	C	D		A	B	C	D
10	5.60	3.50	2.00	3.90	54	16.60	14.50	13.00	14.90
12	6.10	4.00	2.50	4.40	56	17.10	15.00	13.50	15.40
14	6.60	4.50	3.00	4.90	58	17.60	15.50	14.00	15.90
16	7.10	5.00	3.50	5.40	60	18.10	16.00	14.50	16.40
18	7.60	5.50	4.00	5.90	62	18.60	16.50	15.00	16.90
20	8.10	6.00	4.50	6.40	64	19.10	17.00	15.50	17.40
22	8.60	6.50	5.00	6.90	66	19.60	17.50	16.00	17.90
24	9.10	7.00	5.50	7.40	68	20.10	18.00	16.50	18.40
26	9.60	7.50	6.00	7.90	70	20.60	18.50	17.00	18.90
28	10.10	8.00	6.50	8.40	72	21.10	19.00	17.50	19.40
30	10.60	8.50	7.00	8.90	74	21.60	19.50	18.00	19.90
32	11.10	9.00	7.50	9.40	76	22.1	20.00	18.50	20.40
34	11.60	9.50	8.00	9.90	78	22.60	20.50	19.00	20.90
36	12.10	10.00	8.50	10.40	80	23.10	21.00	19.50	21.40
38	12.60	10.50	9.00	10.90					
40	13.10	11.00	9.50	11.40					
42	13.60	11.50	10.00	11.90					
44	14.10	12.00	10.50	12.40					
46	14.60	12.50	11.00	12.90					
48	15.10	13.00	11.50	13.40					
50	15.60	13.50	12.00	13.90					
52	16.10	14.00	12.50	14.40					

深圳市文章济美科技有限公司

一般公差 GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10 ANGLES ±2°				制图 (DR): Kavin 2016.08.31				品名(TITLE): 0.5mm 母座有柱 2.0H			
修订 SER				修改摘要 REVISION DESCRIPTION				料号(PART NO): 5001-BAK0520-**-FR			
签名 SIGNATURE				日期 DATE				比例(SCALE): 1:8			
版本 (REV) A				审核 (CHKD):				单位(UNITS): mm			
核准 (APPD):				张数(SHEET): 1 OF 1				图幅(SIZE): A4			