



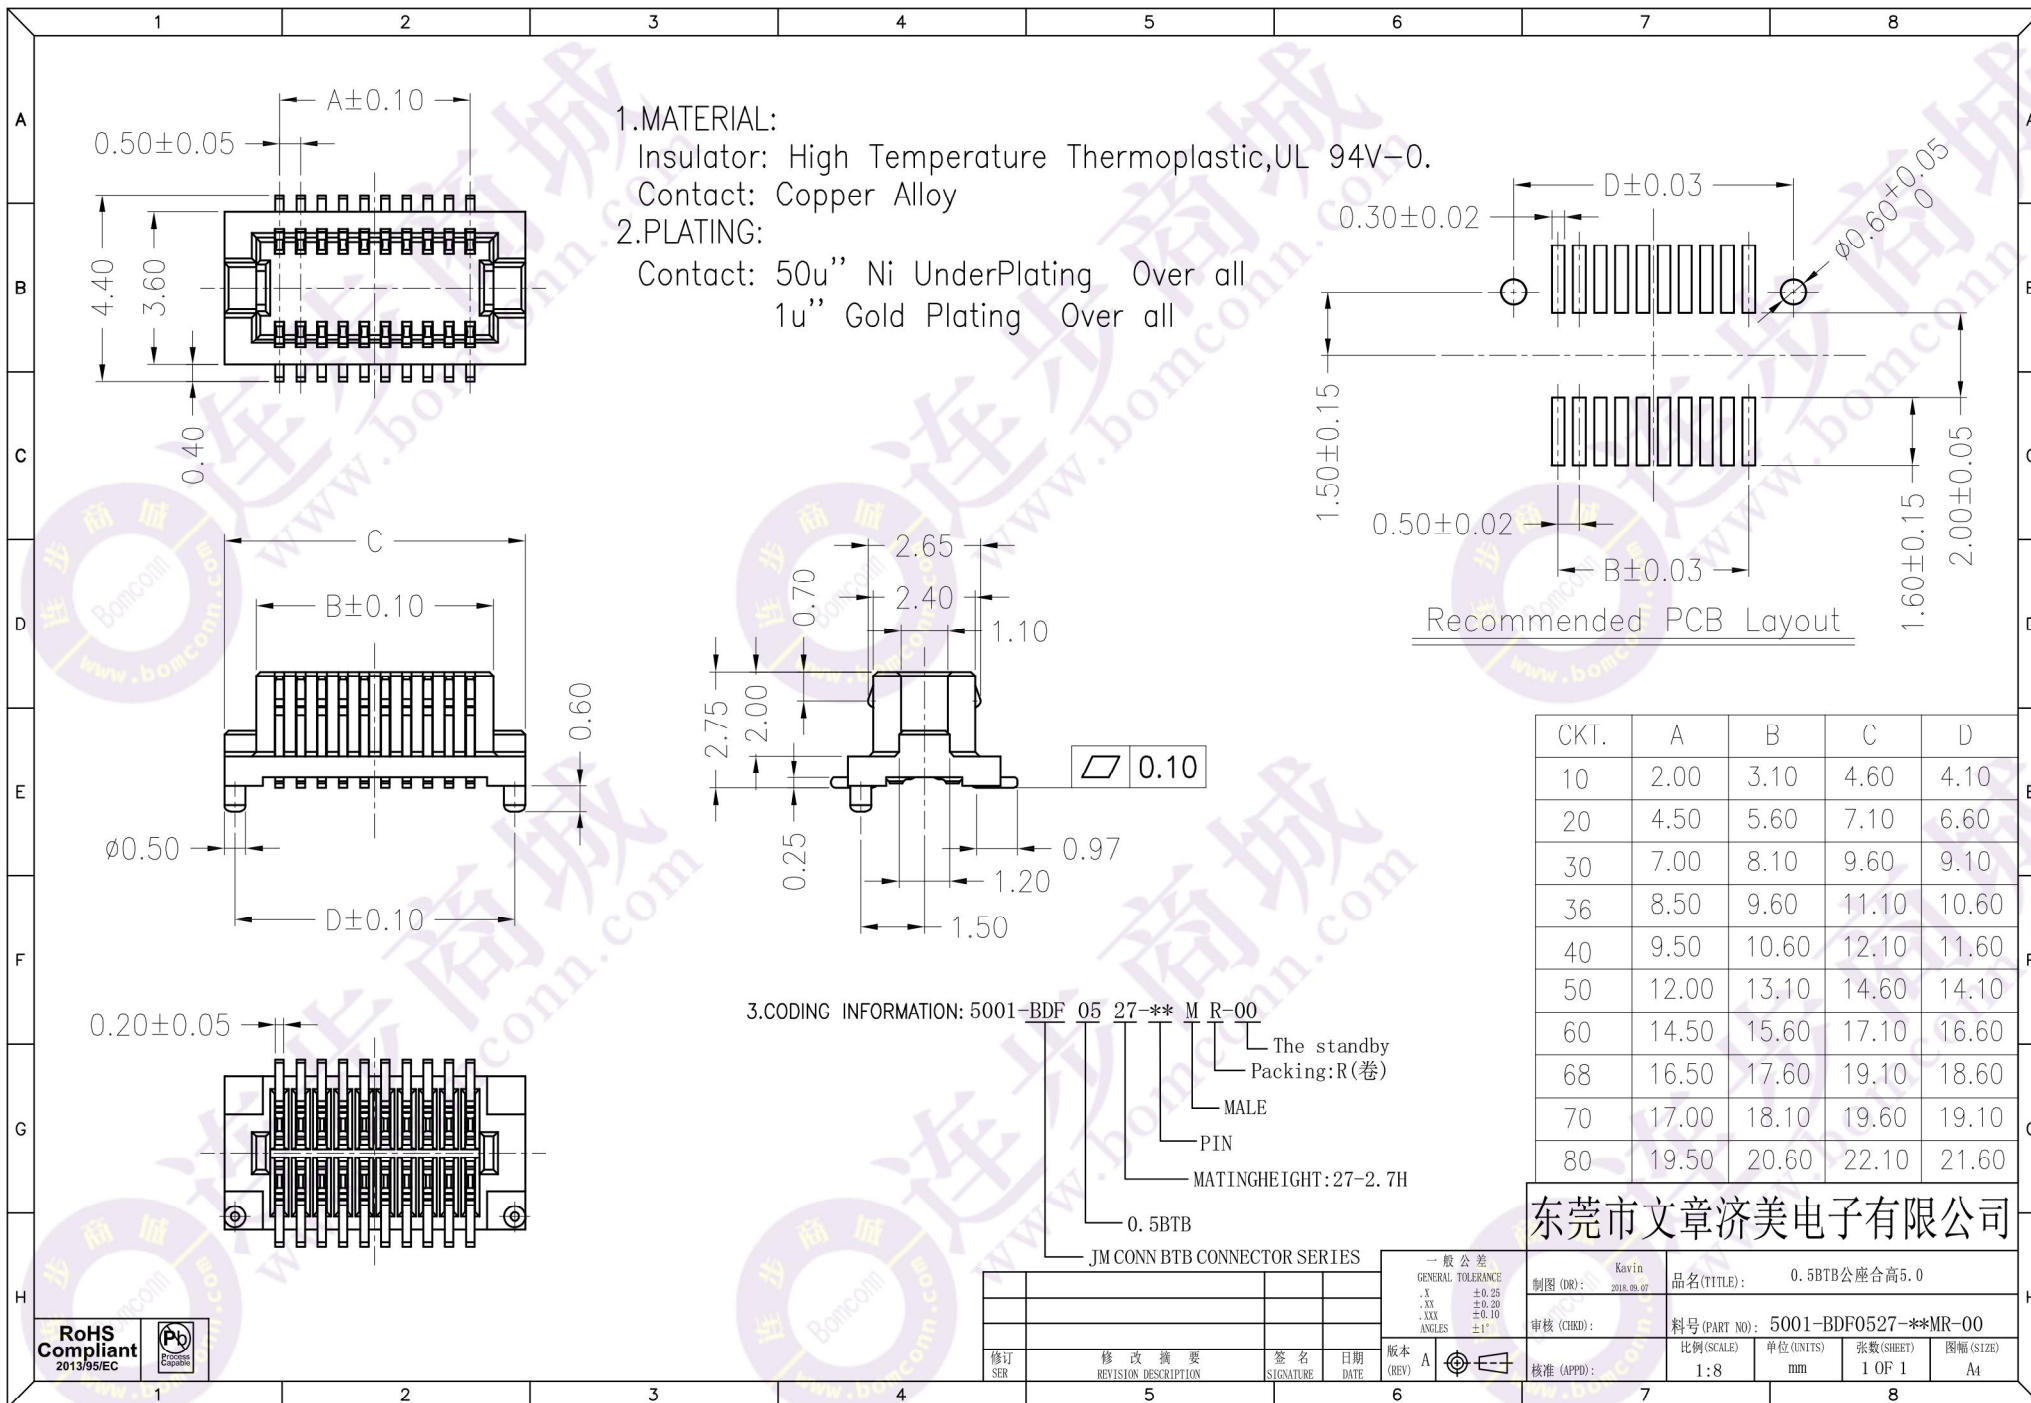

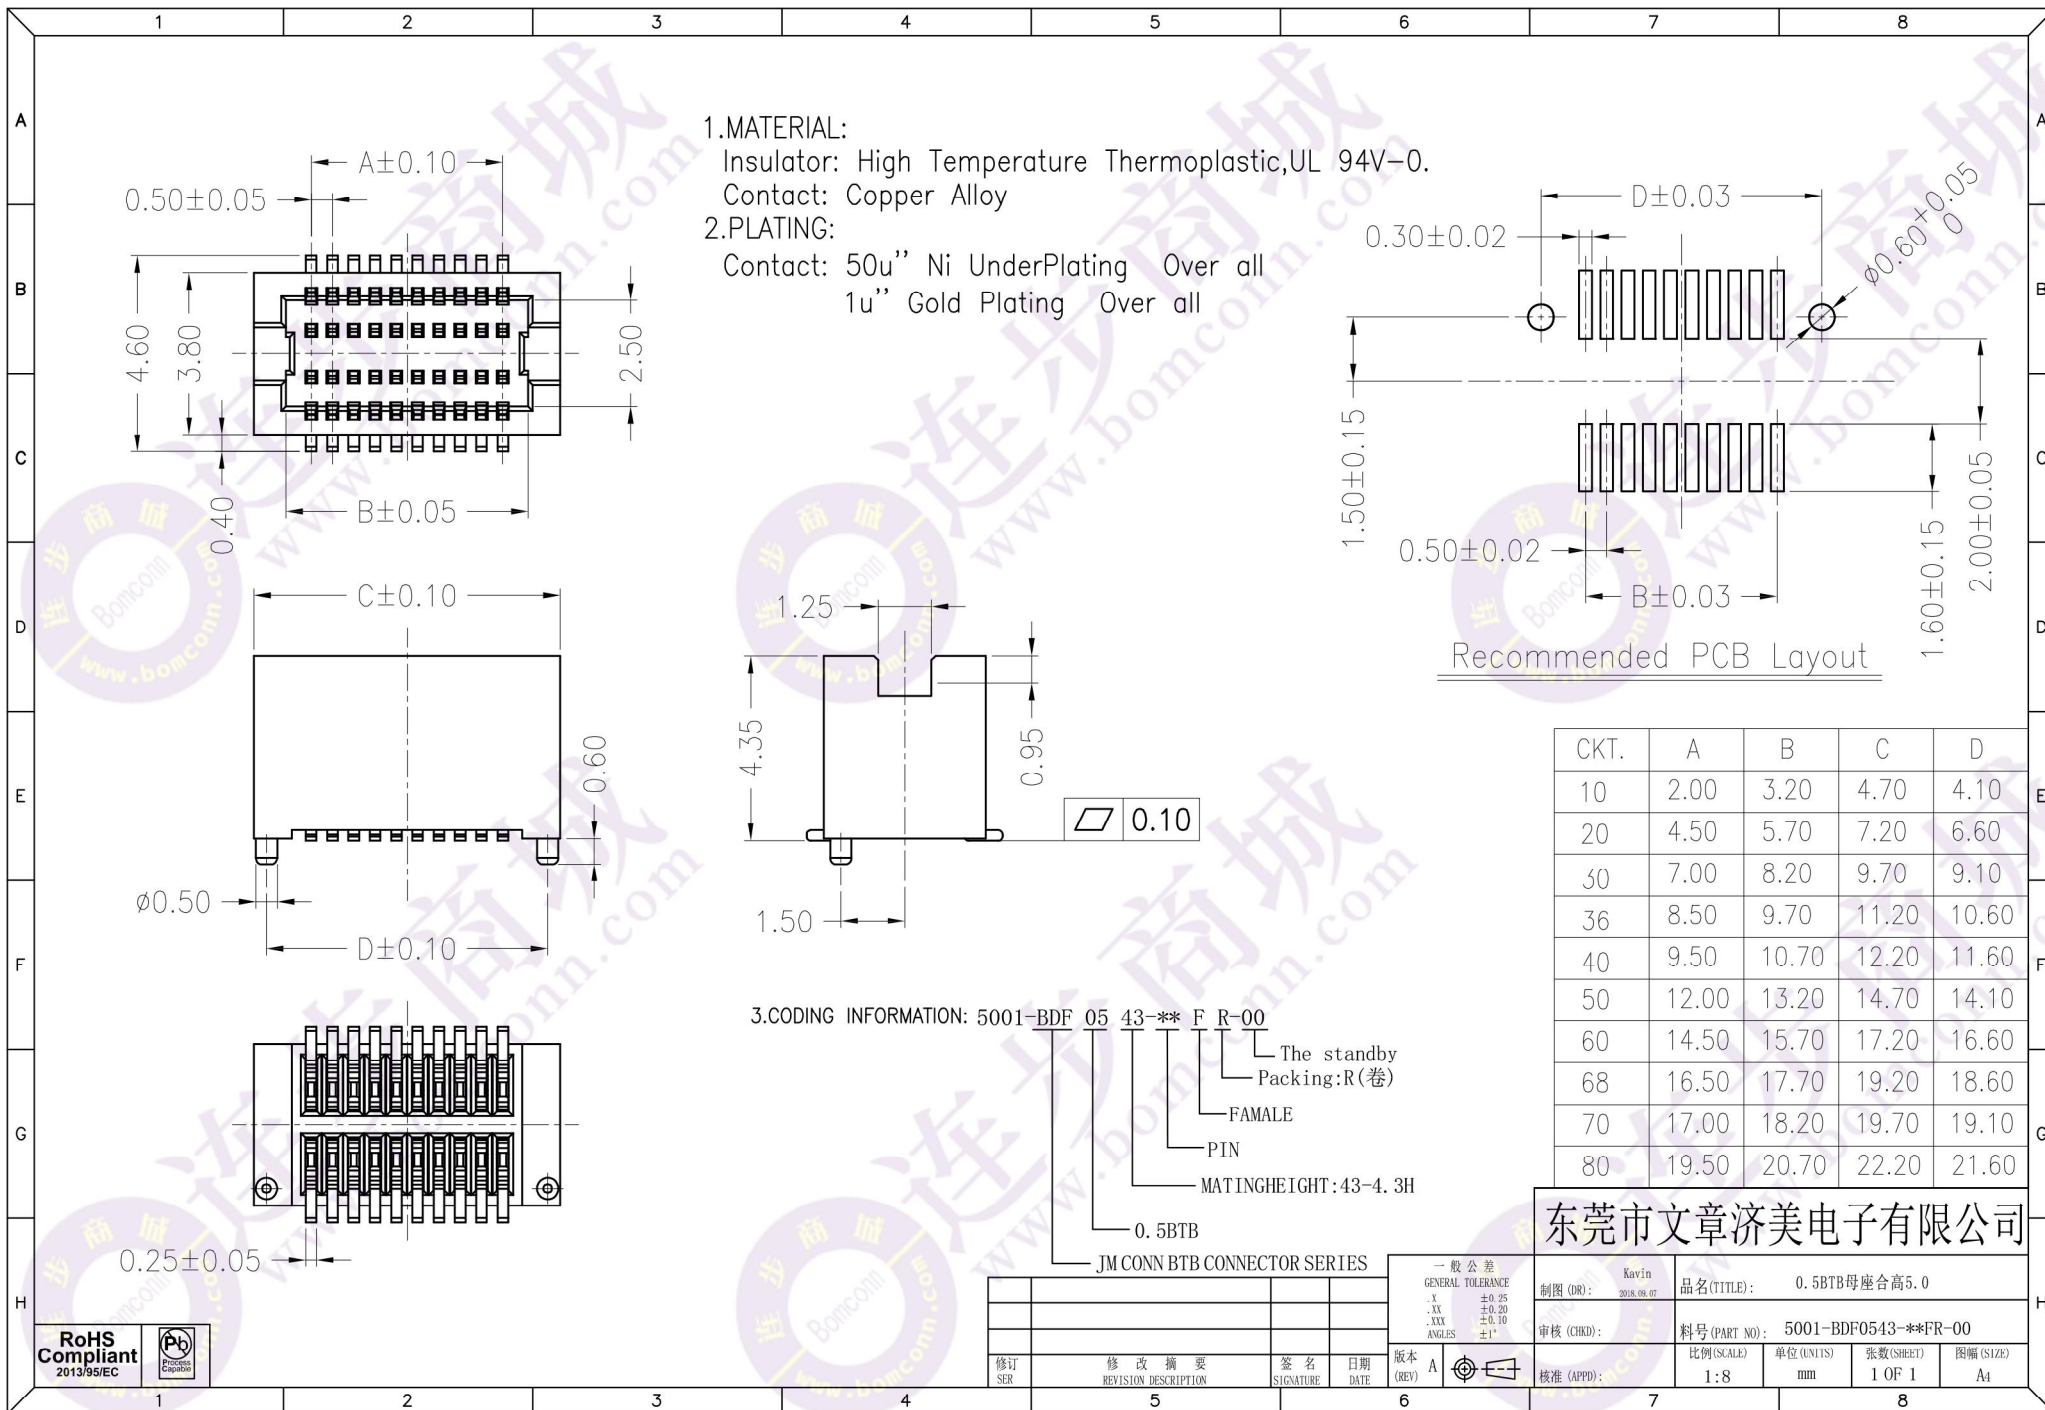

1.MATERIAL:

Insulator: High Temperature Thermoplastic,UL 94V-0.

Contact: Copper Alloy

2.PLATING:

Contact: 50u" Ni UnderPlating Over all

1u" Gold Plating Over all

Recommended PCB Layout

3.CODING INFORMATION: 5001-BDF 05 43-** F R-00

The standby
Packing:R(卷)

FEMALE

PIN

MATINGHEIGHT: 43-4. 3H

0. 5BTB

JM CONN BTB CONNECTOR SERIES

一般公差
GENERAL TOLERANCE
.X ±0.25
.XX ±0.20
.XXX ±0.10
ANGLES ±1°

修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE

版本
(REV) A

东莞市文章济美电子有限公司

制图 (DR):
2018.09.07

品名(TITLE): 0.5BTB母座高5.0

审核 (CHKD):

料号(PART NO): 5001-BDF0543-**FR-00

核准 (APPD):

比例(SCALE):
1:8

单位(UNITS):
mm

张数(SHEET):
1 OF 1

图幅(SIZE):
A4

RoHS
Compliant
2013/95/EC

