
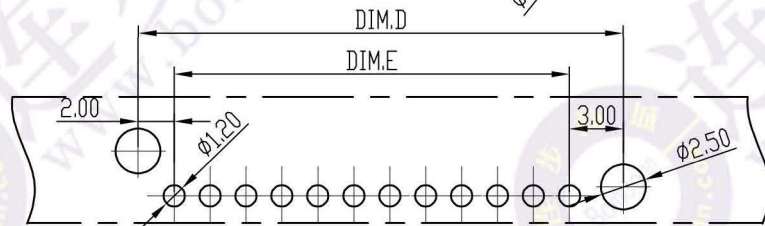
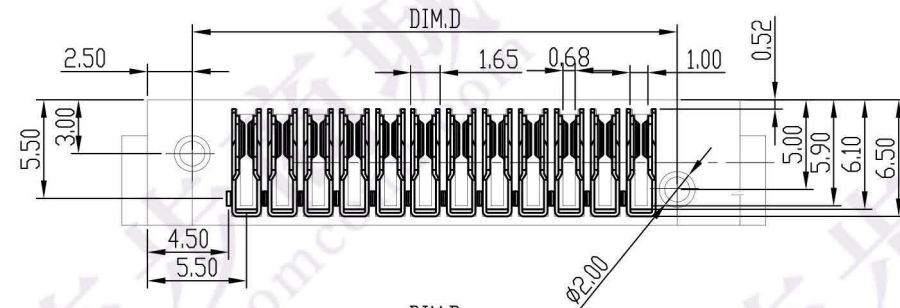


REV.	DESCRIPTION	DRAW.	DATE.

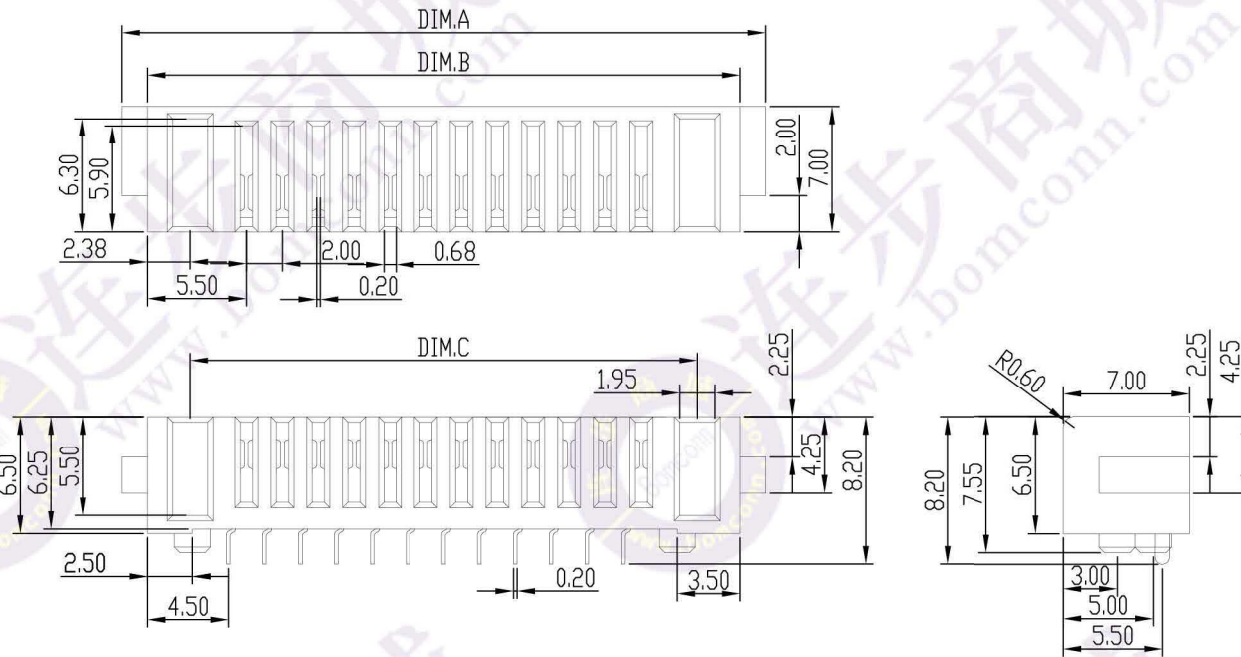

Recommended P.C.B Layout

Material
 Insulator : Nylon 9T (UL94V-0)
 Contact : Phosphor Bronze
 Contact Plated : Gold over Nickel or Tin
 Specification
 Current Rating : 5A
 Instant Current : 7A
 Contact Resistance : 30m Ω
 Insulation Resistance : 100M Ω
 Dielectric Voltage : 500V
 Operating Temperature : -40°~105°

Pos.No.	P/N.	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E
2Pin	5001-DP2065C-02FT-00	15.85	13.00	8.25	7.00	2.00
3Pin	5001-DP2065C-03FT-00	17.85	15.00	10.25	9.00	4.00
4Pin	5001-DP2065C-04FT-00	19.85	17.00	12.25	11.00	6.00
5Pin	5001-DP2065C-05FT-00	21.85	19.00	14.25	13.00	8.00
6Pin	5001-DP2065C-06FT-00	23.85	21.00	16.25	15.00	10.00
7Pin	5001-DP2065C-07FT-00	25.85	23.00	18.25	17.00	12.00
8Pin	5001-DP2065C-08FT-00	27.85	25.00	20.25	19.00	14.00
9Pin	5001-DP2065C-09FT-00	29.85	27.00	22.25	21.00	16.00
10Pin	5001-DP2065C-10FT-00	31.85	29.00	24.25	23.00	18.00
11Pin	5001-DP2065C-11FT-00	33.85	31.00	26.25	25.00	20.00
12Pin	5001-DP2065C-12FT-00	35.85	33.00	28.25	27.00	22.00
13Pin	5001-DP2065C-13FT-00	37.85	35.00	30.25	29.00	24.00
14Pin	5001-DP2065C-14FT-00	39.85	37.00	32.25	31.00	26.00
15Pin	5001-DP2065C-15FT-00	41.85	39.00	34.25	33.00	28.00

东莞市文章济美电子有限公司

UNLESS OTHERWISE SPECIFIED, TOLERANCE:		DESIGN	DATE	01/01/20	TITLE: BATTERY FEMALE 2.0PITCH BOARD TO BOARD CONNECTOR	
X.	±0.20	APPROVED	DATE		SCALE: :1	UNIT: mm
X.x	±0.15	PART NO		5001-DP2065C-**FT-00	REV: 01	
X.xx	±0.10	DRAWING NO		DP2065C	SIZE: A4	SHEET: 1/1
ANGULAR	±2°					