
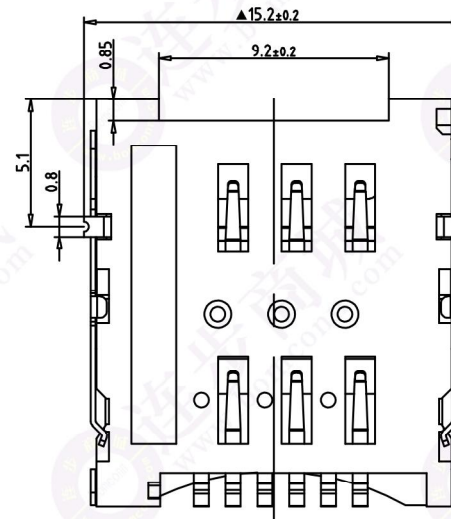


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2015/04/20


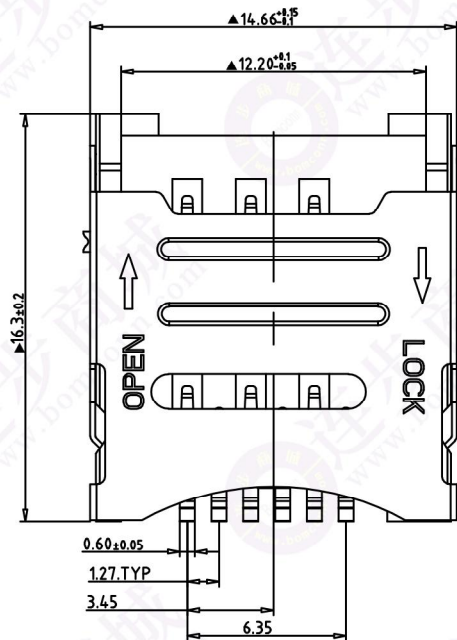


一、材质和镀涂:


- 1、胶芯: LCP, UL 94 V - 0, 黑色
- 2、端子: 磷铜C5210-H, T=0.15, 镍底镀金
- 3、外壳: 不锈钢 SUS304 T=0.2

二、技术参数:

- 接触电阻: 100mΩ Max
- 绝缘阻抗: 1000MΩ Min(500DC)
- 额定电流: 每个接插件1A Max
- 额定电压: 30V Max(DC)
- 耐压: 500V r.m.s/min
- 使用温度: -40℃~85℃
- 湿度: 90%~95%
- 寿命: >3000次

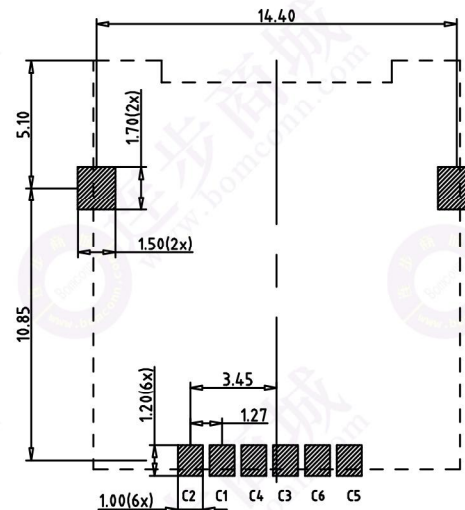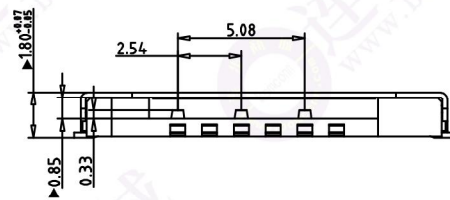

PCB LAYOUT

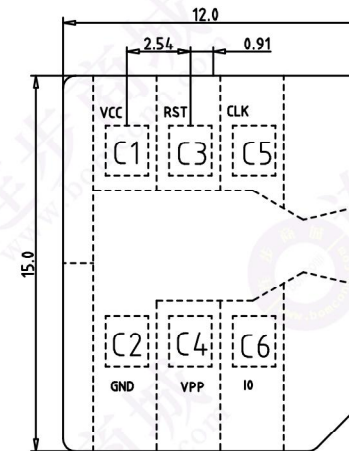

MICRO SIM

PIN NO.	NAME	PIN NO.	NAME
C1	VCC	C4	VPP
C2	GND	C5	CLK
C3	RST	C6	I0

GENERAL TOLERANCE		DWG NO.	5001A1205-001	APPD:		WND		Scale	1:1
X.±0.45	x.'±5'	Title	MICRO SIM CARD 6P 1.8H 掀盖式	CHKD:				UNIT	mm
.X±0.35	.x'±2'			DR:					
.XX±0.25	.xx'±1'	Part NO.	5001-SM2018A-06R1-00	Date	2015/04/20				
.XXX±0.15	.xxx'±0.5'								
SHEET	1/1	<p style="text-align: center;">东莞市商阳电子有限公司</p>							