


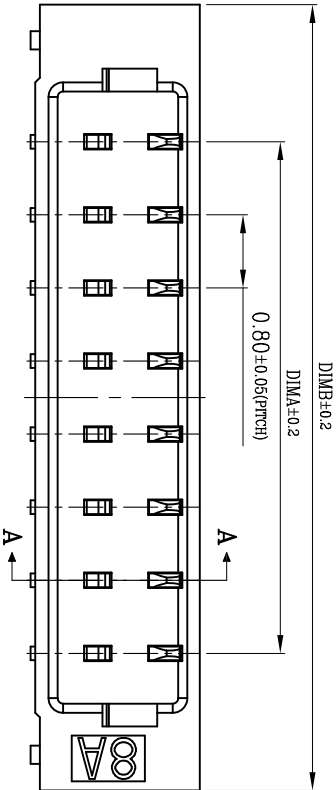


版次	变更摘要		日期	序号	品名	材质
	0	新产品发行				

①	0.8- C型卧式WTB散芯	LCP UL94V-0 自然色
②	0.8- C型卧式WTB端子	铜合金/表面镀锡
③	0.8- C型卧式WTB焊片	铜合金/表面镀锡

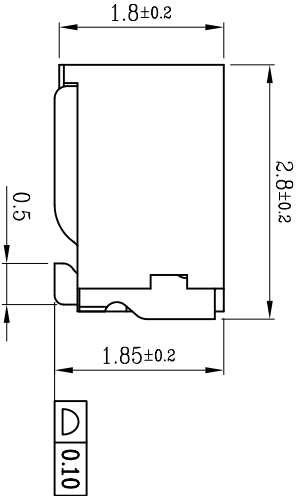

SECTION A-A

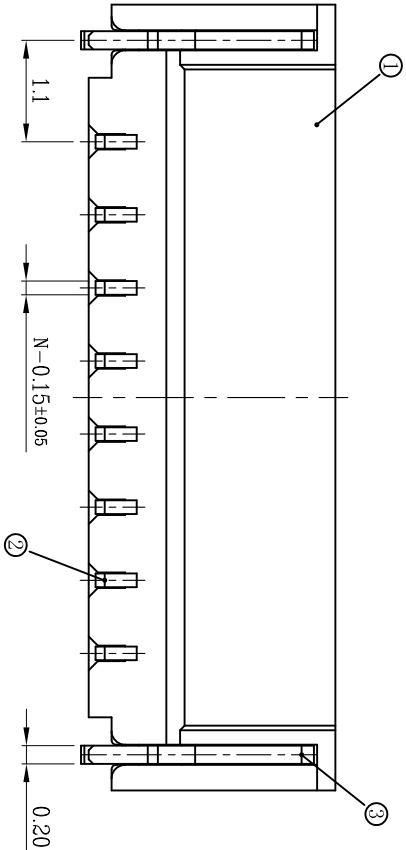

技术指标:

- 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
- 温度范围: -25° C~85° C.
- 额定电压: 30V, AC/DC.
- 耐电压: 200V, AC/minute.
- 接触电阻: ≤0.02Ω.
- 绝缘电阻: ≥100MΩ.
- 额定电流: 0.5A AC/DC.
- 产品料号: 5001 - WF 0008 A - ** R 1
- JM CONNECTOR SERIES
- PITCH: 0.8
- A: 卧贴
- ALTERNATE
- PACKING: R: 卷; T: 管
- PIN

CKT	DIM A	DIM B	CKT	DIM A	DIM B
2	0.80	3.80	16	12.00	15.00
3	1.60	4.60	17	12.80	15.80
4	2.40	5.40	18	13.60	16.60
5	3.20	6.20	19	14.40	17.40
6	4.00	7.00	20	15.20	18.20
7	4.80	7.80	21	16.00	19.00
8	5.60	8.60	22	16.80	19.80
9	6.40	9.40	23	17.60	20.60
10	7.20	10.20	24	18.40	21.40
11	8.00	11.00	25	19.20	22.20
12	8.80	11.80	26	20.00	23.00
13	9.60	12.60	27	20.80	23.80
14	10.40	13.40	28	21.60	24.60
15	11.20	14.20			

深圳市文章济美科技有限公司



一般公差 (TOLERANCE)
X ±0.50 XX ±1.0
X ±0.20 XXX ±0.5
ANGLES ±1°

品名 (TITLE)	0.80 Pitch C型卧式WTB	制图 (DRA)	Anlan
料号 (DWGNO)	5001-WF0008A-**-R1-00	校对 (CHKD)	王涛
比例 (SCALE)	1:1	审核 (APPD)	黄志明
单位 (UNITS)	mm	张数 (SHEET)	1 Of 1
		SIZE	A4
		REV	A

P.C.B Layout

CONN.

