






SECTION A-A

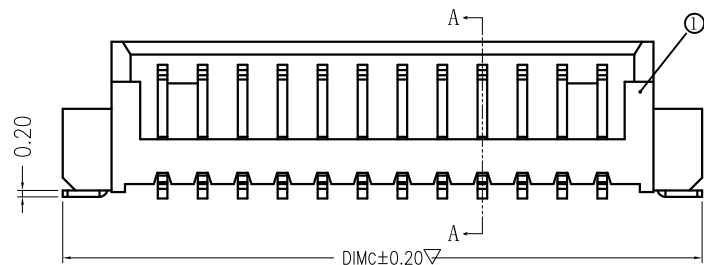


WITHOUT COVER



WITH COVER

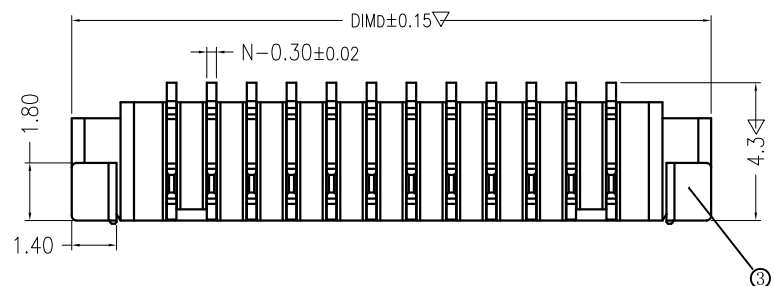


2 PIN



3 PIN

LOCK CONFIGURATION (锁扣位置)

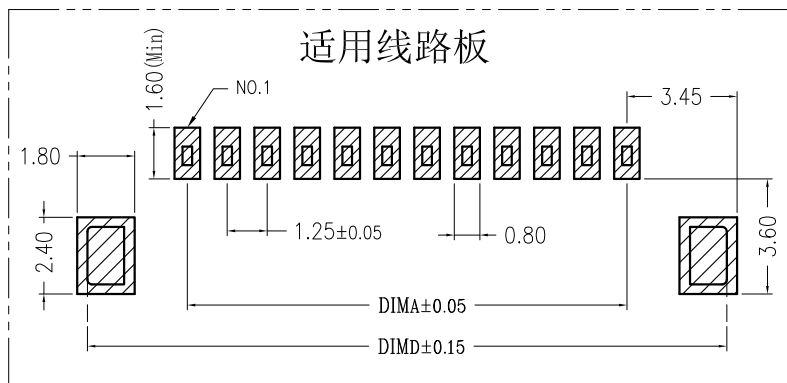

| 序号 | 项目 | 描述  | 备注 |
|----|----|-----|----|
| 1  | 塑胶 | LCP |    |
| 2  | 端子 | 黄铜  |    |
| 3  | 焊片 | 黄铜  |    |
| 4  | 盖子 | LCP |    |

一般公差 (TOLERANCE)  
 X ±0.50 XX ±1.0  
 X ±0.20 .XXX ±0.05  
 ANGLES ±1°

| REV(版本) | DESCRIPTION(描述) | NAME(名字) | DATE(日期) |
|---------|-----------------|----------|----------|
|         |                 |          |          |

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -25° C~85° C.  
Working temp:-25° C~85° C.
3. 额定电压: 100V, AC/DC.  
Voltage rating:100V AV/DC(rms)
4. 接触电阻: ≤40mΩ.  
Contact resistance:40mΩ max.
5. 绝缘电阻: ≥100MΩ.  
Insulation resistance:100MΩ min
6. 额定电流: 1A, AC/DC.  
Current rating:1A AV/DC
7. 耐电压: AC 500V/1分钟  
Withstanding Voltage:500V AC/minute
8. PIN保持力: 5N min  
pin Retention Force:5N min
9. 主体材料:LCP UL94-V0, 本色.  
Housing material:LCP UL94-V0, 本色
10. 端子材:黄铜C2680, 镀镍50u" min, 镀亮锡100u"min  
Terminal materl:Brass C2680,  
plating Ni 50u" min, plating Tin 100u"min
11. 焊片材料:黄铜C2680, 镀镍50u" min, 镀亮锡100u"min  
Solder tab material:Brass C2680,  
plating Ni 50u" min, plating Tin 100u"min
12. 标有"▽"为重点管控  
MAJOR DIMENSION:▽

| CKT | DimA  | DimB  | DimC  | DimD  |
|-----|-------|-------|-------|-------|
| 2   | 1.25  | 3.25  | 7.50  | 7.50  |
| 3   | 2.50  | 4.50  | 8.75  | 8.75  |
| 4   | 3.75  | 5.75  | 10.00 | 10.00 |
| 5   | 5.00  | 7.00  | 11.25 | 11.25 |
| 6   | 6.25  | 8.25  | 12.50 | 12.50 |
| 7   | 7.50  | 9.50  | 13.75 | 13.75 |
| 8   | 8.75  | 10.75 | 15.00 | 15.00 |
| 9   | 10.00 | 12.00 | 16.25 | 16.25 |
| 10  | 11.25 | 13.25 | 17.50 | 17.50 |
| 11  | 12.50 | 14.50 | 18.75 | 18.75 |
| 12  | 13.75 | 15.75 | 20.00 | 20.00 |
| 13  | 15.00 | 17.00 | 21.25 | 21.25 |
| 14  | 16.25 | 18.25 | 22.50 | 22.50 |
| 15  | 17.50 | 19.50 | 23.75 | 23.75 |
| 16  | 18.75 | 20.75 | 25.00 | 25.00 |
| 17  | 20.00 | 22.00 | 26.25 | 26.25 |
| 18  | 21.25 | 23.25 | 27.50 | 27.50 |
| 19  | 22.50 | 24.50 | 28.75 | 28.75 |
| 20  | 23.75 | 25.75 | 30.00 | 30.00 |

深圳市文章济美科技有限公司  
 ShenZhen WenZhang JiMei Technology Co.,.Ltd

|                       |            |        |
|-----------------------|------------|--------|
| 品名 (TITLE)            | 制图 (DR)    | 刘林杰    |
| Pitch:1.25mm 立贴闭口 SMT | 校对 (CHKD)  | 刘林杰    |
| 料号 (DWG. NO)          | 审核 (APPD)  | 韩晓球    |
| 5001-WF0125B-***R1-00 | 页码 (SHEET) | SIZE   |
| 比例 (SCALE)            | 1:1        | 1 OF 1 |
| 单位 (UNITS)            | mm         | A4     |
| 比例尺符号                 | REV        | A      |