
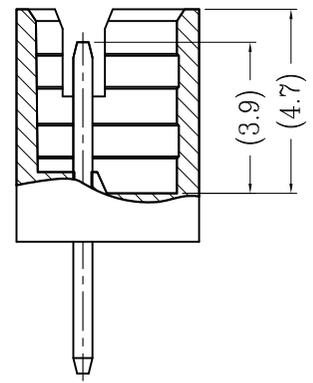
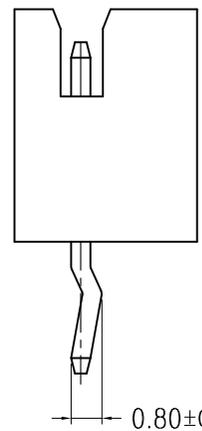
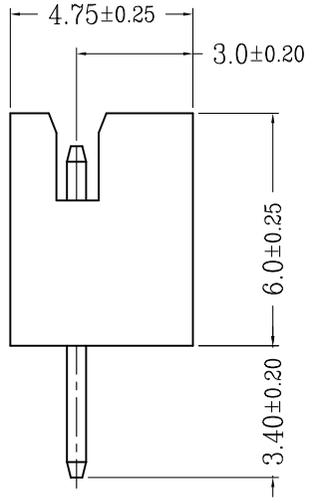
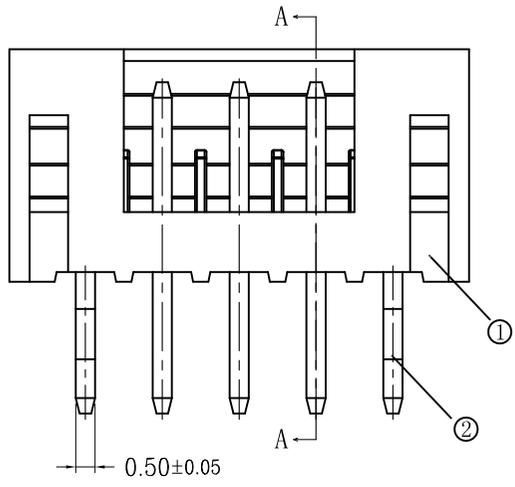
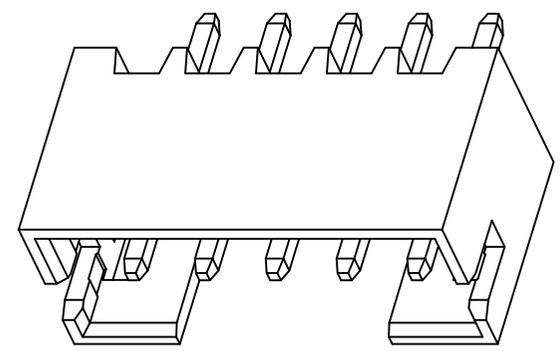


版次	变更摘要	日期	序号	品名	材质
0	新产品发行	2017/01/12	①	PH2.0直针WTB胶芯	PA66 UL94V-0 米色 白色 红色
			②	PH2.0直针WTB端子	铜合金/表面镀锡

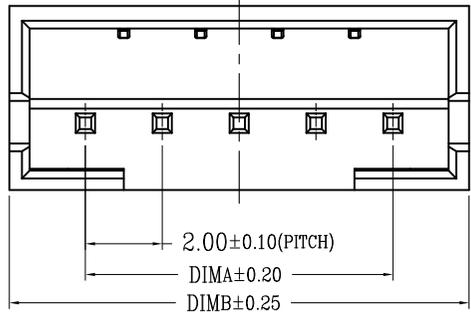

TYPE 1 (无K脚)

TYPE 2 (打K脚)


SECTION A-A

CKT	A	B	CKT	A	B
2	2.0	6.0	12	22.0	26.0
3	4.0	8.0	13	24.0	28.0
4	6.0	10.0	14	26.0	30.0
5	8.0	12.0	15	28.0	32.0
6	10.0	14.0	16	30.0	34.0
7	12.0	16.0	17	32.0	36.0
8	14.0	18.0	18	34.0	38.0
9	16.0	20.0	19	36.0	40.0
10	18.0	22.0	20	38.0	42.0
11	20.0	24.0			

技术指标:

1. 工作温度: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
2. 额定电压: 200V DC/AC(rms).
3. 额定电流: 2.0A AC, DC.
4. 接触电阻: $\leq 20\text{m}\Omega$.
5. 耐压值: 500V AC/minute.
6. 绝缘电阻: $\geq 1000\text{M}\Omega$.
7. 产品料号: 5001 - PH0 020 C - ** P 1

JM CONNECTOR SERIES
PITCH: 2.0
C: 直插
1: 无K脚, 2: 打K脚
PACKING: P: 袋
PIN

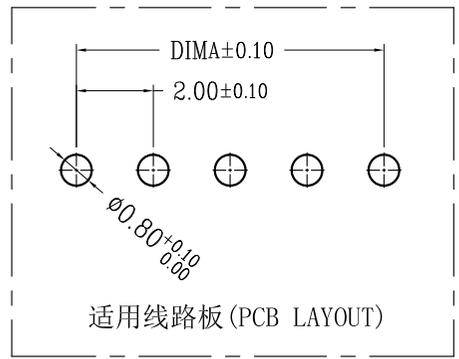

一般公差 (TOLERANCE)
X ±0.50 XX ±1.0
X ±0.20 XXX ±0.05
ANGLES ±1°

深圳市文章济美科技有限公司

品名 (TITLE)	PH2.0直针WTB	制图 (DR)	
料号 (DWG.NO)	5001-PH0020C-**P1-00	校对 (CHKD)	
比例 (SCALE)	1:1	审核 (APPD)	
单位 (UNITS)	mm	张数 (SHEET)	1 OF 1
		SIZE	A4
		REV	A