

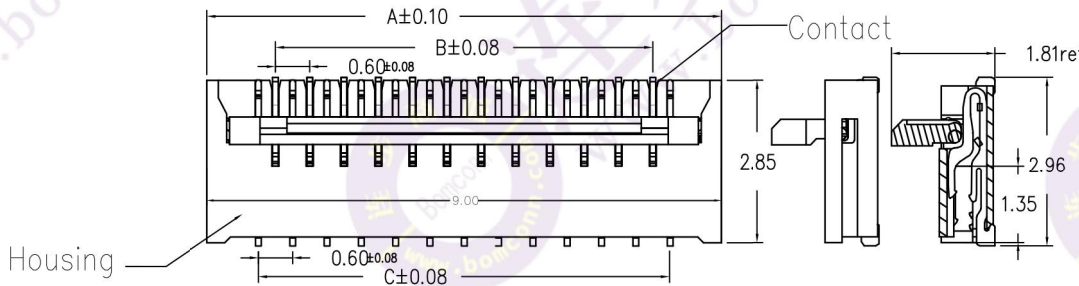

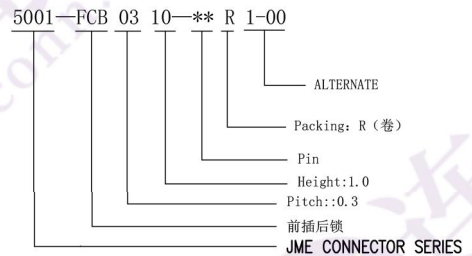


FPC/FFC Insert Direction
Recommended P.C.B Layout

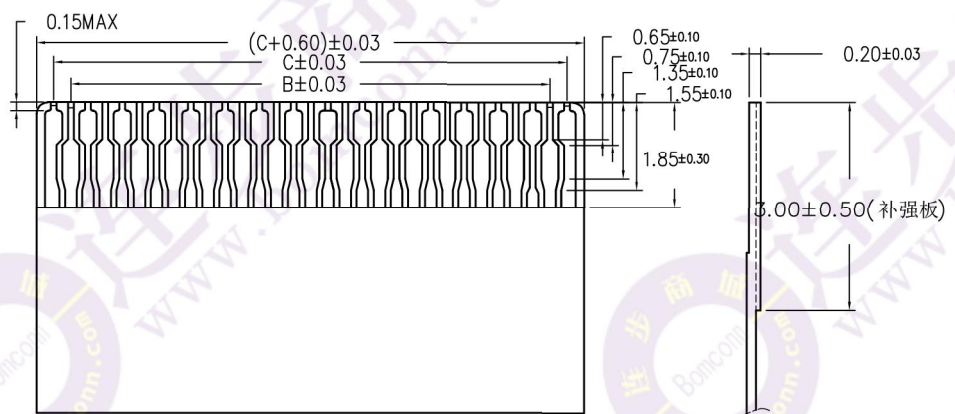

- Note:
- Material
 - Housing: LCP UL94-V0 Color:Natural.Or Black
 - Actuator: PA9T HF Color: Natural Or Black
 - Contact: Phosphor Bronze.
 - Plating
 - Contact: See Part Number.
 - Rating:
 - Operating Voltage: 30V AC/DC.
 - Current Rating: 0.2A AC/DC.
 - Operating Temperature: -55°C~+85°C.
 - Part Number:

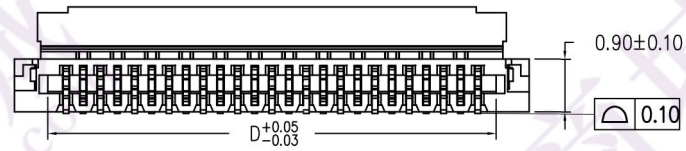

No. of Contacts	Dimension			
	A	B	C	D
7	3.60	1.20	1.80	2.43
9	4.20	1.80	2.40	3.03
11	4.80	2.40	3.00	3.63
13	5.40	3.00	3.60	4.23
15	6.00	3.60	4.20	4.83
17	6.60	4.20	4.80	5.43
19	7.20	4.80	5.40	6.03
23	8.40	6.00	6.60	7.23
25	9.00	6.60	7.20	7.83
27	9.60	7.20	7.80	8.43
31	10.80	8.40	9.00	9.63
39	13.20	10.80	11.40	12.03
45	15.00	12.60	13.20	13.83
51	16.80	13.40	15.00	15.63

Applicable FPC

本产品需符合 RoHS SONY00259 HF 其他
※禁止使用本公司所禁用有毒物质

REV	DESCRIPTION	ECN.NO	BY	DATE
A	NEW DRAWING			04/15'15

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED
公差参考表

X.X	±0.30	X.X*	±5*
X.XX	±0.20	X.XX*	±2*
X.XXX	±0.02	X.XXX*	±1*

东莞市文章济美电子有限公司

TITLE: FPC 0.3Pitch 1.0H ZIF
产品名称: 后掀盖式

APPD: 核准: DWG NO: 5001-FCB0310-**-R1-00
CHECK: 校对: 产品料号:
DATE: 20111102 SCALE: 1:1 UNIT: mm PAGE: 1/1
DRAW: 绘图: